




LT10.7M SERIES OF CERAMIC FILTER(DIP TYPE)

TECHNICAL CHARACTERISTICS

Part Number	3dB Band With (kHz)	20dB Band Width (kHz)max	Insertion Loss (dB)max	Spurious Attenuation (9-12MHz) (dB)min
LT10.7M□ Series of Ceramic Filter For FM Receiver				
LT10.7MA5	280±50	650	6.0	30
LT10.7MS2	230±50	600	6.0	40
LT10.7MS3	180±40	520	7.0	40
LT10.7MJ	150±40	400	10.0	40
LT10.7M□A10 Series of Ceramic Filter (Low-Loss Type)				
LT10.7MA5A10	280±50	590	2.5±2.0	30
LT10.7MS2A10	230±50	520	3.0±2.0	35
LT10.7MS3A10	180±40	470	3.5±1.5	35
LT10.7MJ A10	150±40	360	4.5±2.0	35
Wide/Narrow Band-width Type LT10.7M□ Series of Ceramic Filter				
LT10.7MA19	350min	950	3±2	20
LT10.7MA20	330±50	680	4±2	30
LT10.7MHY	110±50	350	7±2	30
LT10.7MFP	20min	95	6.0max	24(10.7±1.0MHz)
LT10.7M□L Series of Ceramic Filter (Low-Profile Type)				
LT10.7MA5L	280±50	650	6.0	30
LT10.7MS2L	230±50	600	6.0	40
LT10.7MS3L	180±40	520	7.0	40
LT10.7MJL	150±40	400	10.0	40
LT10.7M□LA10 Series of Ceramic Filter (Low-Loss/Low -profile Type)				
LT10.7MA5LA10	280±50	590	2.5±2.0	30
LT10.7MS2LA10	230±50	520	3.0±2.0	35
LT10.7MS3LA10	180±40	470	3.5±1.5	35
LT10.7MJLA10	150±40	360	5.5±2.0	35
Wide/Narrow Band-width Type LT10.7M□L Series of Ceramic Filter (Low-profile Type)				
LT10.7MA19L	380±50	950	5.0	30
LT10.7MA20L	330±50	680	6.0	30
LT10.7MHYL	110±50	350	10.0	30

*Input/Output Impedance:330Ω


OUTLINE DIMENSIONS (mm)

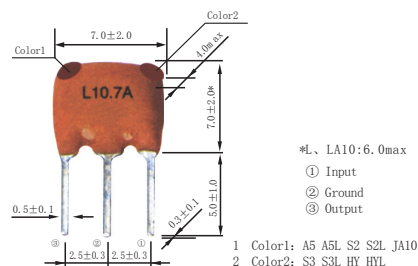

STANDARD RULE

Center Frequency	Color
D:10.64MHz±30kHz	Black
D:10.67MHz±30kHz	Blue
D:10.70MHz±30kHz	Red
D:10.73MHz±30kHz	Orange
D:10.76MHz±30kHz	White

TEST CIRCUIT

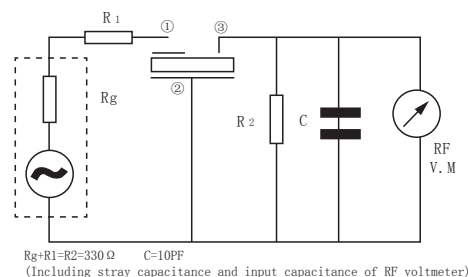

CHARACTERISTICS

