

XT□MB/MJ SERIES OF CERAMIC TRAP


■ TECHNICAL CHARACTERISTICS

Part Number	Center Frequency (fn1) (MHz)	Trap Attenuation (at fn1) (dB)min	20dB Attenuation Band Width (fn1) (kHz)min	30dB Attenuation Band Width (fn1) (kHz)min
XT3.58MB	3.580	25		40 (25dB Att BW)
XT4.43MB	4.430	30		50
XT4.5MB	4.500	35		70
XT5.5MB	5.500	35		90
XT5.74MB	5.742	35		90
XT6.0MB	6.000	35		90
XT6.5MB	6.500	35		90
XT3.58MJ	3.580	20	20	
XT4.43MJ	4.430	20	40	
XT4.5MJ	4.500	20	40	
XT5.5MJ	5.500	20	40	
XT5.74MJ	5.742	20	40	
XT6.0MJ	6.000	20	40	
XT6.5MJ	6.500	20	40	


*The level at 1MHz shall be made for a reference(0dB)

■ XT□MB SERIES OF CERAMIC TRAP


● OUTLINE DIMENSIONS (mm)

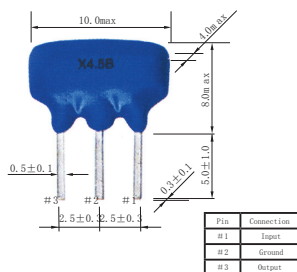

● TEST CIRCUIT

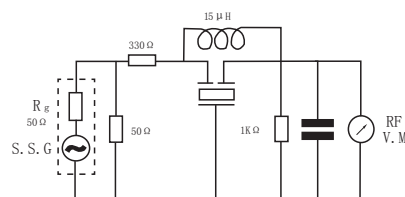


● CHARACTERISTICS

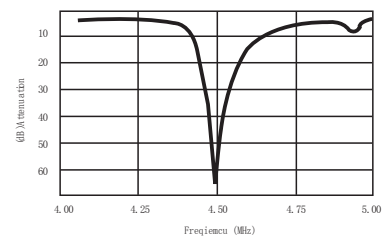


■ XT□MJ SERIES OF CERAMIC TRAP

● OUTLINE DIMENSIONS (mm)



● TEST CIRCUIT

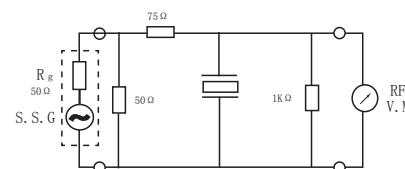

● CHARACTERISTICS

